


DL5K

5000 watt Dummy Load

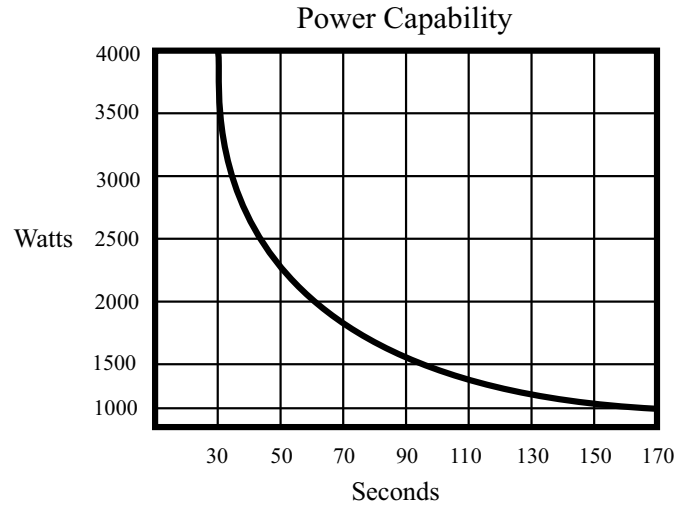

The Palstar DL5K dummy load utilizes solid ceramic resistive elements that are non-inductive and very resistant to overload and can be used at high temperature.

Specification:

- Impedance 55 ohms +0/-10%
- SWR <1.3 1 - 30Mhz
- Power Dissipation see chart (1000 watts continuous)
5000 watts for 30 seconds
- Meter range 500 watts LOW and 5000 watts HIGH
- Rating/Frequency 1 - 30Mhz 5000 watts single tone cw max
- Fan system Thermostatically controlled Fan(2) @160cfm
1.6 amps@12vdc.Special switchmode PS included
On time vs Off time fan ratio is approx 3:1
- Size 9"W x 8"H x 14"D
- Weight 12 lbs 5.5Kg



9676 N. Looney Rd, Piqua, OH 45356
1-800-773-7931
WWW.PALSTAR.COM